
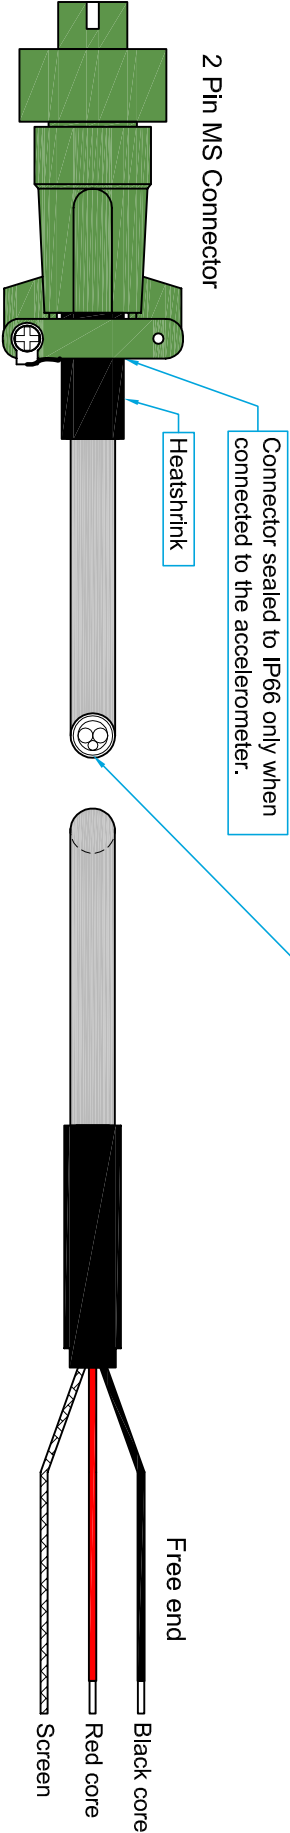
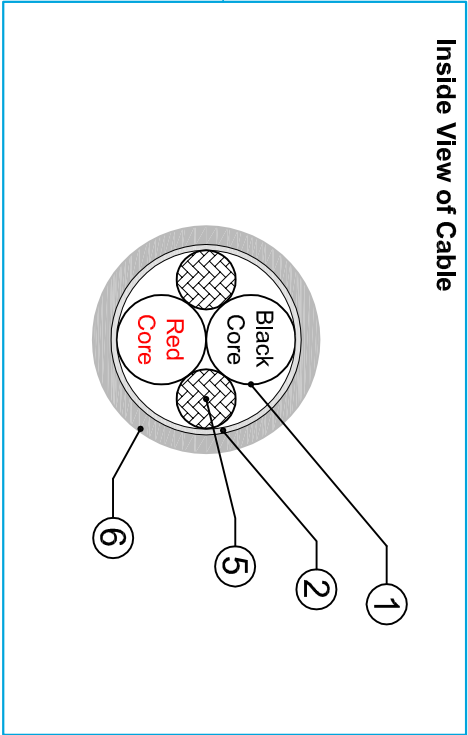


Connection Details of Cable Assembly

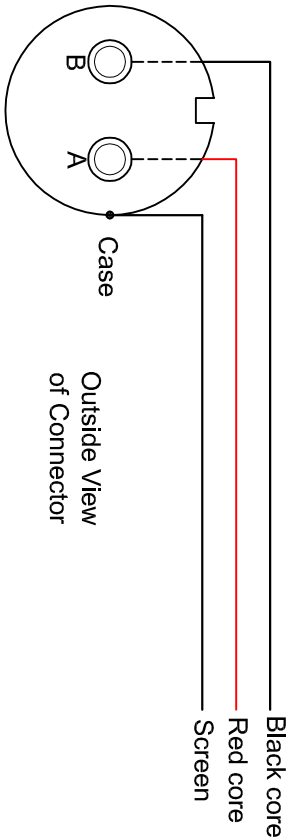

Materials of Cable: 2 Core Screened PVC Cable			
Pos	Description	Overall Diameter	Remarks
1.	Twin twisted core plain annealed copper conductors.	1.2mm Nominal	7/0.2mm
2.	Insulated with PVC type T1 2 to BS 6746		
3.	Spiral screened with T.A.C.W.	0.15mm Nominal	
4.	Capacitance core to screen:		210pF/m
5.	Capacitance core to core:		120pF/m
6.	Cotton filler to produce round cable		
6.	Sheathed in Grey or Black PVC type 6 to BS 6746	4.8mm Nominal	Non flame retardant, rated from -40°C to +80°C